


Spirabelt

The Future is Open! PATENTED

NEW CORRUGATING BELT FOR DOUBLE FACERS

TECHNICAL DATA

Material	Polyester spiral 1,2 MM
Pintle	Polyester 1,2 MM
Weight	2000 gsm
Thickness	4,0 mm
Breaking point	8,500Kg/mt
Temperature range	up to 180°C
Air Permeability	1100 CFM

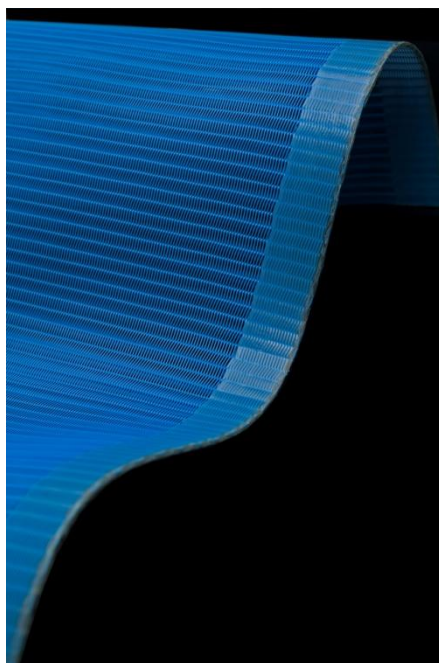

DESIGN

Special multispiral based fabric with polyester monofilaments

APPLICATIONS

Latest and very important development of the corrugator belt technology. Suitable for high speed machines with shoe press system; very high permeability for a better and faster drainage of the board. Low weight for less power consumption and good tracking. Easy installation and virtually no seam. Perfect dimensional stability and reinforced edges with special coating.