


# Spiratrack

TRACTION BELT FOR CORRUGATED MACHINES

## TECHNICAL DATA

Material	Polyester spiral 0,8 MM/Silicone top
Pintle	Polyester 0,8 MM
Weight	3800 gsm
Thickness	4,00 mm
Breaking point	8,500Kg/mt
Temperature range	up to 180°C

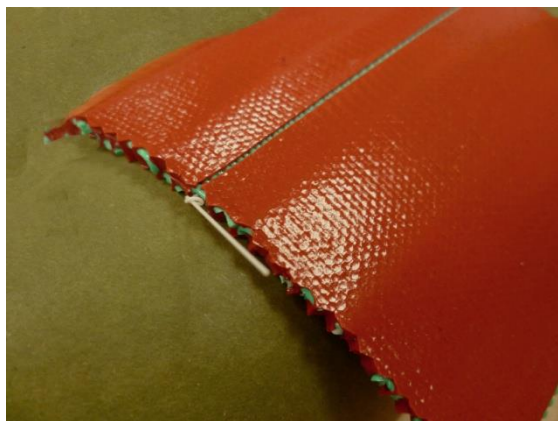

## DESIGN

Special multispiral polyester fabric covered with high friction silicone

## APPLICATIONS

Bottom belts for corrugating machines requiring high grip on the board or when using a Spirabelt in top position.